


RIM SS2

NorthStar™ brand

RIM SS2 Signal Splitter

Key Features

- Eliminates the Expense and Maintenance of Two Separate Encoders
- Optically Isolated Outputs can be Sent to a Motor Drive and a Display at the Same Time
- Compatible with Virtually Every Incremental Digital Encoder
- Combats Long Distance and Electrical Interference Problems

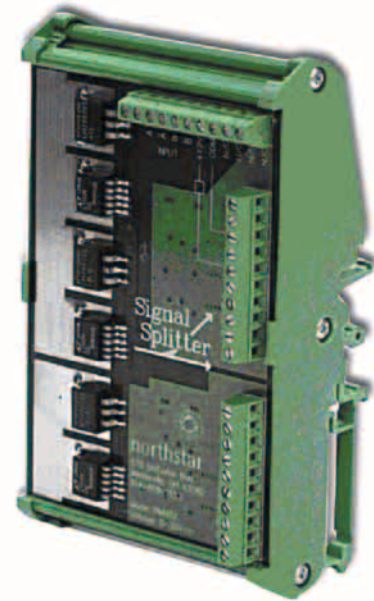

SPECIFICATIONS

STANDARD OPERATING CHARACTERISTICS

Input Signal: 2 or 3 channel quadrature signal, sine or square wave, open collector, differential, or single ended line driver

ELECTRICAL

Input Signal Voltage: 4 - 26 VDC
Input Signal Current: 2.2 mA minimum, 3.5 mA typical
Input Impedance: Optically isolated, 1 kOhm at 4V, 6.8 kOhms at 24V typical. Current limited.
Frequency Range: 0 - 120 kHz
Output Signal: Two independent, isolated line driver output sets (A/A, B/B)
Supply Voltage: 5 - 26 VDC
Output Current: 150 mA (maximum per channel)
Wire Gauge Accepted: 26 -16 AWG
Output Protection: ESD to MIL-STD-883 and short circuit protected

MECHANICAL

Enclosure Material: PVC
Mounting Options: DIN 32 or 35


ENVIRONMENTAL

Operating Temperature: 0°C to 50°C
Storage Temperature: -20°C to 70°C
Operational Humidity: 98% non-condensing

ORDERING INFORMATION

Part Number: RIM SS2

DIMENSIONS

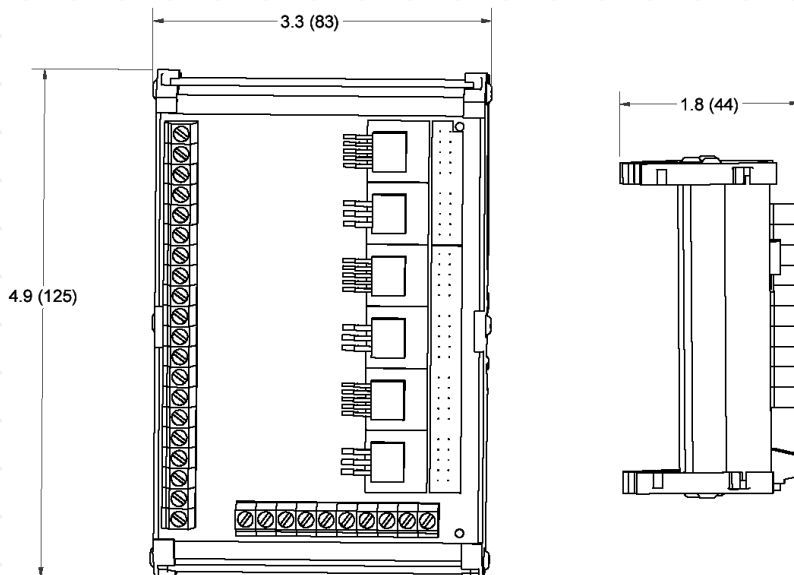



Worldwide Brands: NorthStar™ • Acuro™ • Dynapar™ • Hengstler™ • Harowe™
Headquarters: 1675 Delany Road • Gurnee, IL 60031-1282 • USA • Phone: 1.847.662.2666 • Fax: 1.847.662.6633

Satellite Locations:

- **North America:** North Carolina, South Carolina, Connecticut, Massachusetts, New York, Canada, British Virgin Islands
- **West Indies:** St. Kitts • **Europe:** United Kingdom, Italy, France, Germany, Spain, Slovakia
- **South America:** Brazil • **Asia:** China, Japan, Korea, Singapore

Customer Service:

Tel.: +1.800.873.8731
Fax: +1.847.662.4150
custserv@dynapar.com